210 x 148

(FR) LUBRIFIANT POUR MONTAGE DE PNEUS

Caractéristiques: Un lubrifiant économique pour le montage de pneus qui permet un montage facile avec un effort minimal. Contient des additifs spéciaux qui garantissent un joint d'étanchéité permanent entre la jante et le pneu, tout en contournant la formation de rouille. Non agressif pour le caoutchouc ou les jantes. Maintient le talon de pneu doux et prêt à l'emploi pendant le stockage d'été ou d'hiver. La formule neutre de pH est douce sur la peau et respectueuse de l'environnement. Sans silicone et sans solvant.

Utilisations: Pour utilisation sur les pneus auto, camion et moto. Compatible avec toutes les jantes en acier, en alliage ou en plastique.

Mode d'emploi: Avant de monter, enlever tout résidu de la jante avec un nettoyant à base de solvant. Enlever la rouille à l'aide d'une brosse métallique. Appliquer avec parcimonie sur le bord du talon et la jante du pneu en utilisant une éponge ou une brosse. Pour garantir un lien positif entre le pneu et la jante, laissez le composé sécher brièvement avant de monter le pneu sur la jante.

Cette information est basée sur notre expérience. Des tests préalables sont avisés avant l'utilisation. Pour plus de détails, voir la fiche technique.

Not classified as dangerous according to the Hazardous Products Regulations (HPR) criteria.

See the **SDS** for more info at/
Voir la **FDS** pour plus d'info au:
wurth.ca or call/ou appeler: **1-800-263-5002**
Manufactured for/Fabriqué pour:
Wurth Canada Limited/Limitée
345 Hanlon Creek Boulevard,
Guelph, ON, N1C 0A1

Non classé comme dangereux selon les critères du Règlement sur les produits dangereux (RPD).

WÜRTH

TIRE MOUNTING LUBRICANT

LUBRIFIANT POUR MONTAGE DE PNEUS

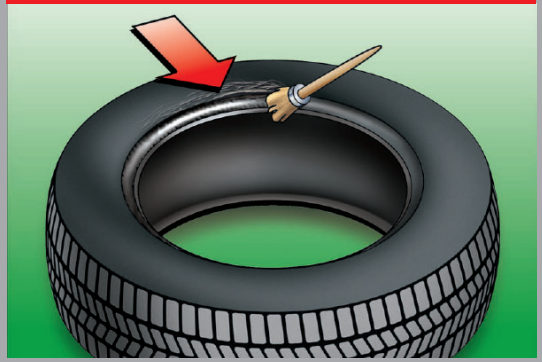

Net content/Contenu:

5 kg (11 lbs)

(EN) TIRE MOUNTING LUBRICANT

Features: An economical tire mounting lubricant that allows for easy fitting with minimal effort. Contains special additives that ensures a permanent seal between the rim and tire, while helping to counteract the formation of rust. Non-aggressive to rubber or rims. Keeps tire bead soft and ready for use during summer or winter storage. It's pH neutral formula is gentle on the skin and environmentally friendly. Silicone and solvent free.

Uses: For use on car, truck and motorcycle tires. Compatible with all steel, alloy or plastic rims.

Directions: Before mounting, remove any residue from rim with a solvent based cleaner. Remove rust using a wire brush. Apply sparingly to the edge of the tire bead and rim using a sponge or brush. To guarantee a positive bond between tire and rim allow compound to dry briefly before seating tire on rim.

This information is based on our experience. Preliminary tests are advised before use. For more details, see the technical data sheet.

Not for retail sale/
Pas pour la vente au détail

Made in Germany/
Fabriqué en en Allemagne

Art. 890.1221 083

4 045989 518722

PAPE | 05/2019 | 890.1221 | V 1.0 | WHMIS 2015

LUBRICATING | LUBRIFIER | LUBRICATING | LUBRIFIER | LUBRICATING | LUBRIFIER | LUBRICATING | LUBRIFIER | LUBRICATING | LUBRIFIER | LUBRICATING | LUBRIFIER